


GC2453

4-Hole Flange SAE J518 C Code 62

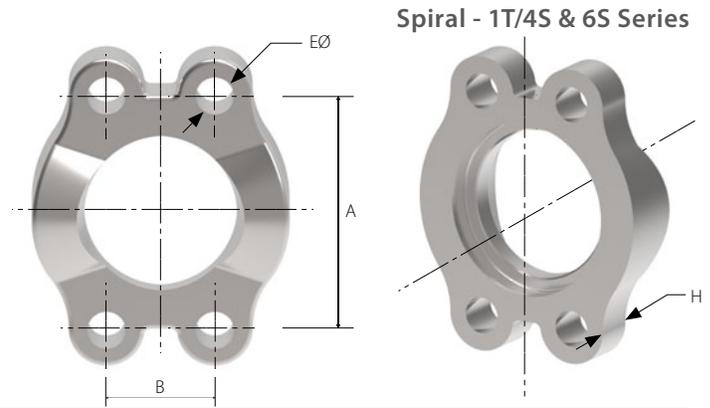

THREAD	HOSE SIZE INFO		DIMENSIONS											
	Thread T	Flange size	Size	Max. Oper. Press	A		B		EØ		H		Bolt Ø metric/ inch	
			bar	mm	in	mm	in	mm	in	mm	in	mm	in	
GC2453-8	1/2"	-08	415	40.5	1.59	18.2	0.72	8.4	0.33	16.0	0.63	M8 / 5/16"		
GC2453-12	3/4"	-12	415	50.8	2.00	23.8	0.94	10.5	0.41	19.0	0.75	M10 / 3/8"		
GC2453-16	1"	-16	415	57.2	2.25	27.8	1.09	12.0	0.47	24.0	0.94	7/16"		
GC2453-16.1	1"	-16	415	57.2	2.25	27.8	1.09	13.0	0.51	24.0	0.94	M12		
GC2453-20	1 1/4"	-20	415	66.7	2.63	31.8	1.25	13.5	0.53	27.0	1.06	1/2"		
GC2453-20.1	1 1/4"	-20	415	66.7	2.63	31.8	1.25	15.0	0.59	27.0	1.06	M14		
GC2453-24	1 1/2"	-24	415	79.4	3.13	36.4	1.43	17.0	0.67	30.0	1.18	M16 / 5/8"		
GC2453-24HS*	1 1/2"	-24	415	79.4	3.13	36.5	1.44	17.0	0.67	30.0	1.18	M16 / 5/8"		
GC2453-32	2"	-32	415	96.8	3.81	44.5	1.75	20.0	0.79	36.5	1.44	3/4"		
GC2453-32.1HS*	2"	-32	415	96.8	3.81	44.5	1.75	21.0	0.83	36.5	1.44	M20		
GC2453-32.2HS**	2"	-32	415	96.8	3.81	44.5	1.75	21.0	0.83	36.5	1.44	M20		


4-hole flanges are an integral part of the end fitting and must be ordered at the same time as the fitting and hose assembly.

* Colour silver

** Colour gold

O-Rings

Part number	D Ø (mm)	S Ø (mm)
05.018-210	18.6	3.5
05.018-214	25.0	3.5
05.018-219	32.9	3.5
05.018-219	32.9	3.5
05.018-222	37.7	3.5
05.018-222	37.7	3.5
05.018-225	47.2	3.5
05.018-228	56.7	3.5
05.018-228	56.7	3.5
05.018-228	56.7	3.5



O-Rings have to be ordered separately.