


Rückschlagventile Standard

Rohranschluss: 24° nach ISO 8434-1

Öffnungsdruck 1 bar

Standardwerkstoff der O-Ringe ist NBR

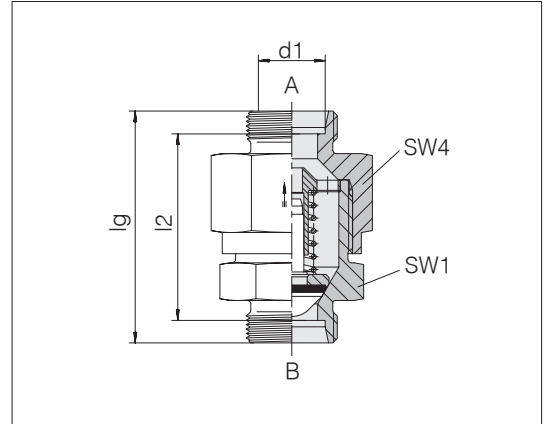

Reihe Rohr-AD d1	Druck	lg	l2	SW1	SW4	kg/100 ca.	Bestell-Nr.	Bezeichnung
L 6	PB 250	43	29	17	17	4,4	0600012081	24-VNRO-L6
L 8	PB 250	44	30	19	19	5,5	0600022081	24-VNRO-L8
L 10	PB 250	54,5	40,5	22	24	9,8	0600032081	24-VNRO-L10
L 12	PB 250	57,5	43,5	27	30	16,5	0600042081	24-VNRO-L12
L 15	PB 250	61,5	47,5	30	32	20,5	0600052081	24-VNRO-L15
L 18	PB 160	66,5	51,5	36	36	29,0	0600062081	24-VNRO-L18
L 22	PB 160	76,5	61,5	41	46	49,5	0600072081	24-VNRO-L22
L 28	PB 100	85	70	50	55	78,4	0600082081	24-VNRO-L28
L 35	PB 100	95,5	74,5	60	65	122,7	0600092081	24-VNRO-L35
L 42	PB 100	99,5	77,5	65	75	162,6	0600102081	24-VNRO-L42
S 6	PB 630	48,5	34,5	19	19	6,6	0600112081	24-VNRO-S6
S 8	PB 630	48,5	34,5	19	19	6,8	0600122081	24-VNRO-S8
S 10	PB 630	55,5	40,5	22	24	11,5	0600132081	24-VNRO-S10
S 12	PB 630	57,5	42,5	24	27	14,5	0600142081	24-VNRO-S12
S 14	PB 630	63,5	47,5	27	32	20,9	0600152081	24-VNRO-S14
S 16	PB 400	67,5	50,5	32	36	27,8	0600162081	24-VNRO-S16
S 20	PB 400	75,5	54,5	41	46	49,5	0600172081	24-VNRO-S20
S 25	PB 400	82,5	58,5	46	50	62,7	0600182081	24-VNRO-S25
S 30	PB 250	96	69	55	60	107,8	0600192081	24-VNRO-S30
S 38	PB 250	107,5	75,5	65	70	161,3	0600202081	24-VNRO-S38