
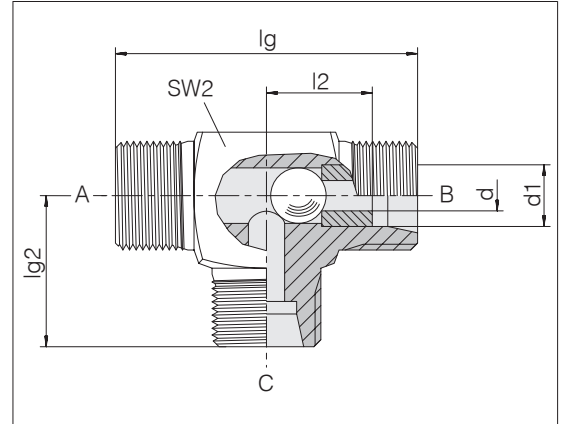


Wechselventile

Kugelsitz

Rohrleitungseinbau

Rohranschluss: 24° nach ISO 8434-1



Reihe		Druck	lg	d	l2	lg2	SW2	kg/100 ca.	Bestell-Nr.	Bezeichnung
L	8	PB 250	42	4,5	14	21	14	5,7	5690992281	24-VST-L8-P
L	10	PB 250	44	6	15	22	17	7,4	5690998281	24-VST-L10-P
L	12	PB 250	48	7,5	17	24	19	10,8	5690997081	24-VST-L12-P
L	15	PB 250	56	10	21	28	19	12,4	5690996281	24-VST-L15
S	6	PB 630	46	3	16	23	14	6,9	5690993281	24-VST-S6-P
S	8	PB 630	48	4,5	17	24	17	9,5	5690999281	24-VST-S8-P
S	10	PB 630	50	6	17,5	25	19	12,4	5690990281	24-VST-S10-P
S	12	PB 630	58	7,5	21,5	29	22	17,7	5690995281	24-VST-S12-P
S	16	PB 400	66	10	24,5	33	24	18,8	5690994281	24-VST-S16